


F05000101T
Deactivator Antenna,
Countertop

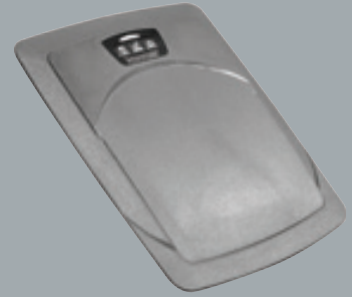

F05000101
Deactivator Antenna,
Flushmount

Soft Label Deactivator

Soft Label Deactivator deactivates active AM EAS labels up to four inches above the surface of the pad for a reliable and virtually seamless process while expediting throughput at the point-of-sale (POS). This unit uses a two-step detect and deactivate process. The integrated status indicators provide visual and audible notifications when live labels are successfully detected and deactivated.

In addition, the deactivator acts as a double-checking device if an associate is ever uncertain whether the label was deactivated. The integrated keypad allows associates to control the volume and tone of the deactivator to distinguish it from other POS equipment. The keypad also initiates the "power-save" mode to help prevent theft by turning the unit off.

With a variety of installation options available – countertop, vertical and flush mount – the sleek design and small footprint maximizes POS counter space. The Value Pad operates off an ordinary electrical outlet and does not require a separate controller.

When connected to a compatible EAS data management device, real-time deactivation counts can be generated into user-friendly customizable reports to provide business-critical data.

Retailer Values

- // Scan-enable functionality only deactivates labels with a valid barcode
- // Slim design allows maximum use of POS space
- // EAS connectivity option allows for generation of operational information to help quickly identify and correct performance
- // Built-in audible and visual indicators provide immediate feedback when active labels are detected and deactivated

Product Codes

Code: F05000101

Deactivator Antenna, Flushmount
Bracket, Power Cord

5606-0079-01

Power Supply

ZBAMB1101

Deactivator Antenna (without keypad)

Product Compatibility

All Sensormatic AM EAS Labels
Wireless Device Manager
Wireless Module
Shrink Management as a Service (SMaaS)
Deactivation Remote Alarm Module

Specifications

Length 21cm (8.3in)
Width 16cm (6.3in)
Height 4cm (1.6in)
Weight 0.95kg (2.1lbs)
Power Cord Length 170cm (5.5ft)
Power Supply Weight 0.28kg (0.6lbs)

Electrical

Deactivator

Input Voltage 18Vdc, 1.7A

Separate Power Supply

Input Voltage 100–240Vac, 50/60Hz
AC Line Current 1Arms (max.)

Output Voltage 18Vdc,
1.7A Listed Class 2

Certified Limited Power Source

Environmental Constraints

Operating Temperature

0°C to 35°C (32°F to 95°F)

Enclosure

0 to 90%, non-condensing